


Data Sheet

008X - Conical Strainer – Mesh Gause

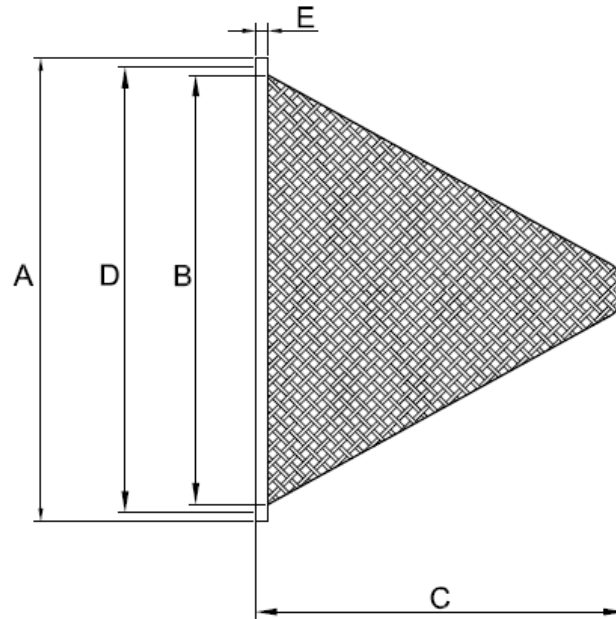


| Size | A | B | C | D – Pipeline ID | E |
|--------|------|------|----|-----------------|-----|
| 1.1/2" | 38.1 | 32.5 | 30 | 34.9 | 1.0 |
| 2" | 51.8 | 45.2 | 44 | 47.6 | 1.0 |
| 2.1/2" | 63.6 | 53.3 | 52 | 60.3 | 1.0 |
| 3" | 76.1 | 70.4 | 60 | 73.0 | 1.0 |

Gause material – 316 SS (1000 Micron), to suit Imperial Screwed Unions including RJT and ISS / IDF

The ISS/IDF Strainer features an additional rectangular Joint Ring

Data Sheet

008Y - Conical Strainers – Expanded Mesh

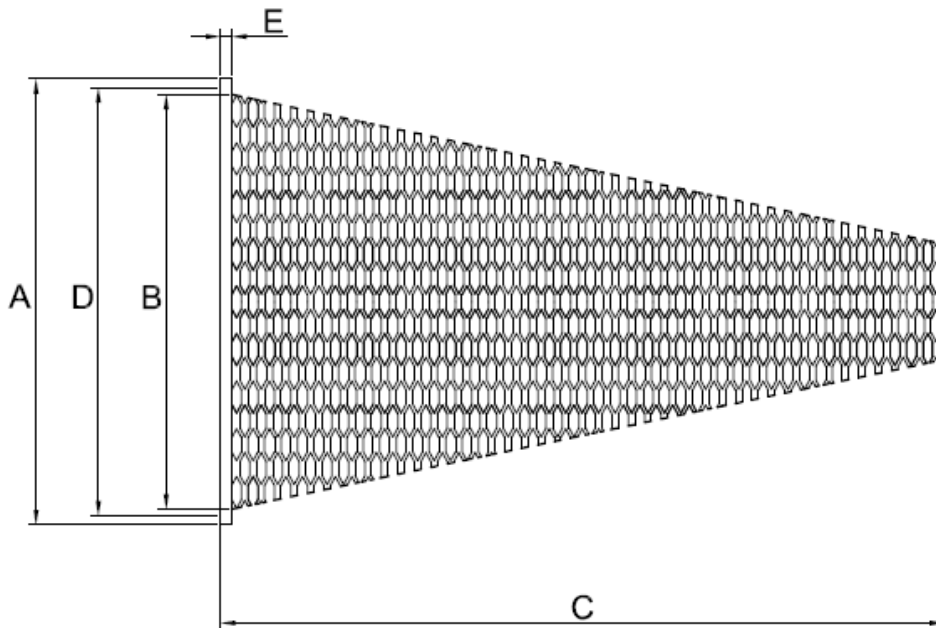

| Size | A | B | C | D – Pipeline ID | E |
|--------|------|------|-----|-----------------|-----|
| 1.1/2" | 38.0 | 27.5 | 100 | 34.9 | 1.0 |
| 2" | 50.0 | 41.5 | 145 | 47.6 | 1.0 |
| 2.1/2" | 62.5 | 53.5 | 150 | 60.3 | 1.0 |
| 3" | 76.1 | 64.0 | 195 | 73.0 | 1.0 |
| | | | | | |

Gause Material – 316L SS Expanded Mesh (1250 x 1750 Micron)
To suit Imperial Screwed Unions including RJT and DIN (Inch Sizes only)
Overall lengths may vary slightly from those stated above